

```
// === Get MySQL Password =====
$file="$root\httpasswd\mysql\passwd.txt" ; //Name and path of pa
$fh = fopen($file, 'r'); //Open for read
$password = trim(fgets($fh)); //Get first line remo
fclose($fh); //Close
// ===== END Get MySQL =====
```

```
/* Webserver upload/save/import directories */
```

```
$cfg['UploadDir'] = "$root\etc\phpmyadmin"; // Directory for uploaded files
$cfg['SaveDir'] = "$root\etc\phpmyadmin"; // Directory where phpMyAdmin can save e:
$cfg['docSQLDir'] = "$root\etc"; // Directory for docSQL imports,
$cfg['TempDir'] = "$root\tmp"; // Directory where phpMyAdmin can save tei
```

```
/* Servers configuration */
```

```
$i = 0;
```

```
/* Server: localhost [1] */
```

```
$i++;
```

```
/* Authentication section */
```

```
$cfg['Servers'][$i]['auth_type'] = 'config'; // Authentication method (config, ht
$cfg['Servers'][$i]['user'] = 'root'; // MySQL user
$cfg['Servers'][$i]['password'] = $password; // MySQL password (only needed with
$cfg['Servers'][$i]['AllowNoPassword'] = false; // Must use password
```


```
/* Server parameters */
```

```
$cfg['Servers'][$i]['verbose'] = 'Uniform Server'; // Verbose name for this host - :
$cfg['Servers'][$i]['host'] = '127.0.0.1'; // MySQL hostname or IP address
$cfg['Servers'][$i]['port'] = $port_ini; // Port set in ini See above
$cfg['Servers'][$i]['socket'] = ''; // Leave blank for default socke
$cfg['Servers'][$i]['connect_type'] = 'tcp'; // How to connect to MySQL server
$cfg['Servers'][$i]['extension'] = 'mysqli'; // MySQL extension to use ('mysq
$cfg['Servers'][$i]['compress'] = false; // No compression
```

```
/* PMA User advanced features */
```


```
$cfg['Servers'][$i]['controluser'] = 'pma';
$cfg['Servers'][$i]['controlpass'] = $password;
```

```
/* Server parameters */
$cfg['Servers'][$i]['verbose'] = 'Uniform Server'; // Verbose name for this host -
$cfg['Servers'][$i]['host'] = '127.0.0.1'; // MySQL hostname or IP address
$cfg['Servers'][$i]['port'] = '3307'; // Port set in ini See above
$cfg['Servers'][$i]['socket'] = ''; // Leave blank for default socke
$cfg['Servers'][$i]['connect_type'] = 'tcp'; // How to connect to MySQL server
$cfg['Servers'][$i]['extension'] = 'mysqli'; // MySQL extension to use ('mysq
$cfg['Servers'][$i]['compress'] = false; // No compression
```

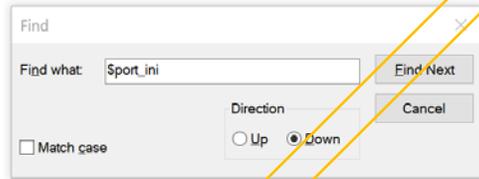

改了這樣子

只作參考, 以下是  
account setting

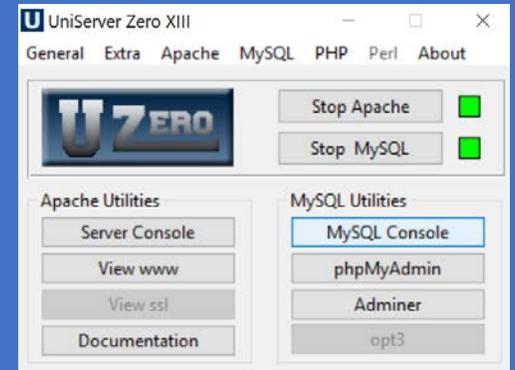

```
cmd "SERVER MySQL Command Console" - mysql.exe --host=127.0.0.1 --port=3307 --user=root --password=root
```

Warning: Using a password on the command line interface can be insecure.

Welcome to the MySQL monitor. Commands end with ; or \g.

Your MySQL connection id is 1


Server version: 5.6.35 MySQL Community Server (GPL)

Copyright (c) 2000, 2016, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

```
mysql>
```

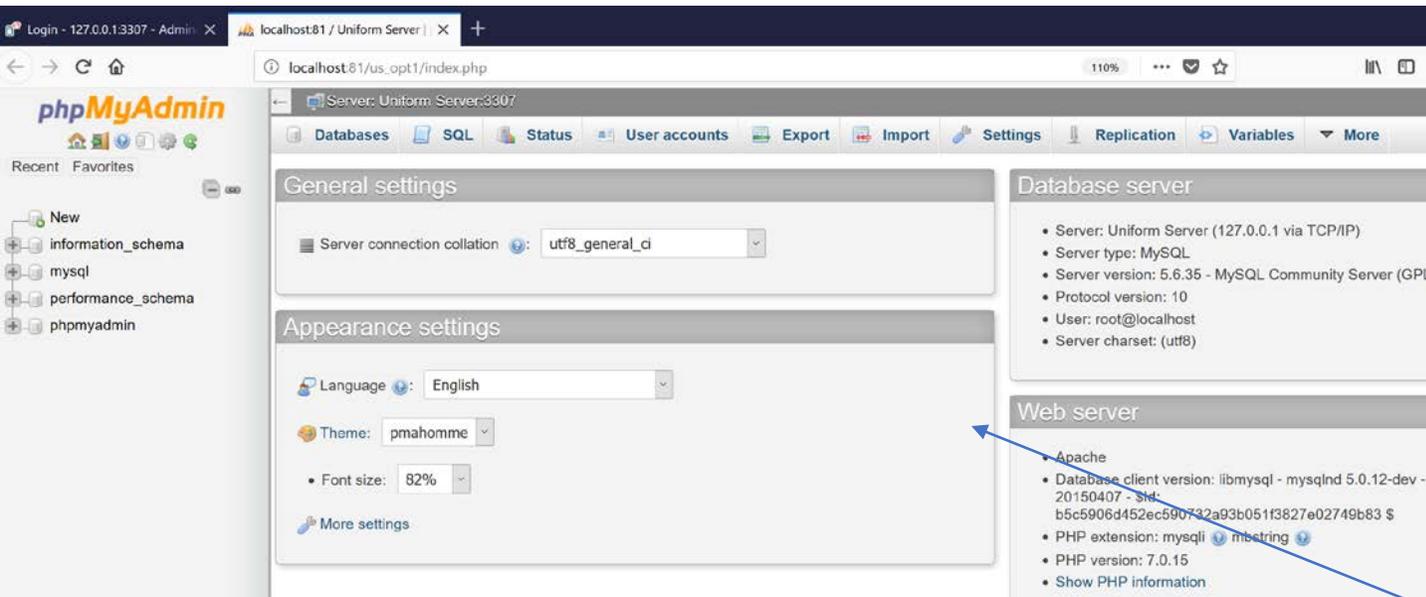

phpMyAdmin 可以了.

